


Flygt slurry pumps



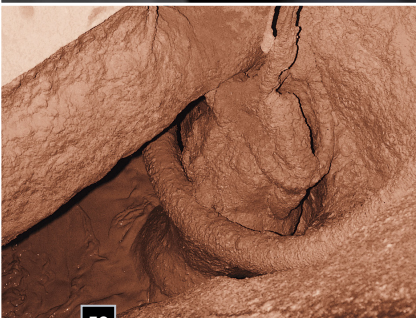

5000 series

Rugged, reliable and cost effective, the Flygt 5000 series of submersible slurry pumps handle transportation of the most abrasive solids that are suspended in liquid.


Designed for excellent performance, low energy consumption, long wear life and easy maintenance, our Flygt 5000 series pumps serve a wide range of slurry transport applications.

With a slim, compact design, these abrasive- and corrosive-resistant portable slurry pumps provide quiet, economical solutions for slurry transportation.

Flygt slurry pumps

5000 series

H 5100

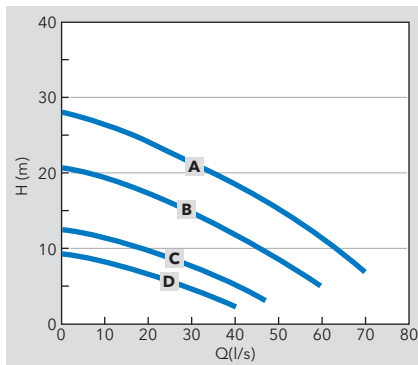

Model	211	251	300
Rating [kW]	7.5-13.5	15-22	22-45
R. current [A]	9.4-28	17-41	25-82
Weight [kg]	215	277	585
Max. height [mm]	978	1124	1296
Max. width [mm]	547	547	595
Discharge Ø [in]	4"	4"	4"
Strainer hole [mm]	30	30	30
Warm liquid, 70°C	Yes	Yes	Yes
Agitator	Yes	Yes	Yes
Ex version	221	261	310

	211	251	300
Performance	A	430	430
	B	432	432
	C	630	630
	D	632	632


(400 = 4 pole, 600 = 6 pole)

E.g. 5100.211 53-430

Internal and external cooling available

For additional specifications, see product technical documentation. With reservation for changes.

5000 series H 5150

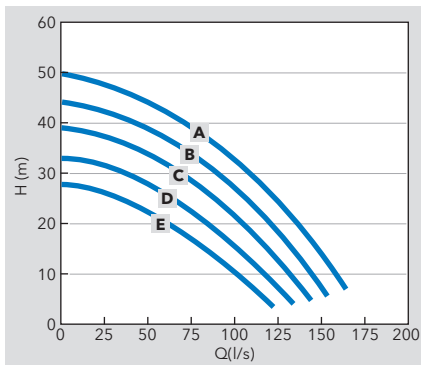

Model	300	350
Rating [kW]	30-45	50-70
Rated current [A]	32-82	59-132
Weight [kg]	654	908
Max. height [mm]	1410	1537
Max. width [mm]	875	875
Discharge Ø [in]	6"	6"
Strainer hole [mm]	36	36
Warm liquid, 70°C	Yes	Yes
Agitator	Yes	Yes
Ex version	310	360

	300	350
Performance	A	430
	B	432
	C	430
	D	432
	E	434


E.g. 5150.350 53-436

Internal and external cooling available

For additional specifications, see product technical documentation. With reservation for changes.

5000 series

H 5520, 5530

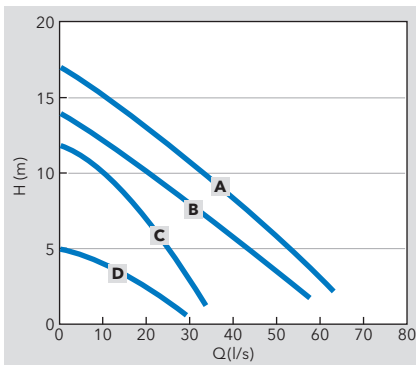

Model	5520	5530
Rating [kW]	3.1	5.9
Rated current [A]	6.3	7-12
Weight [kg]	122	203
Max. height [mm]	848	848
Max. width [mm]	478	632
Discharge Ø [in]	4"	6"
Strainer hole [mm]	20	30
Warm liquid, 70°C	Yes	Yes
Agitator	No	Yes
Ex version	Yes	Yes


	5520	5530
Performance	A	434
	B	436
	C	436
	D	438

E.g. 5530.181 53-436

External cooling available

For additional specifications, see product technical documentation. With reservation for changes.

5000 series H 5570

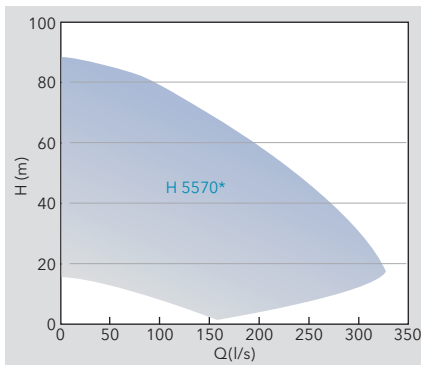

*Consult pump selection program for details on performance.

Model	5570 600 drive	5570 700 drive
Rating [kW]	58-105	100-215
Rated current [A]	118-200	202-395
Weight [kg]	1190-1350	1700-2000
Max. height [mm]	1675-2068	1829-2312
Max. width [mm]	983-1225	983-1225
Discharge Ø [in]	8"	8"
Strainer hole [mm]	30	30
Warm liquid, 70°C	No	No
Agitator	No	Yes
Ex version	Yes	Yes

External cooling available

For additional specifications, see product technical documentation. With reservation for changes.