


UL Listed Flexible Sprinkler Hose (Pending)

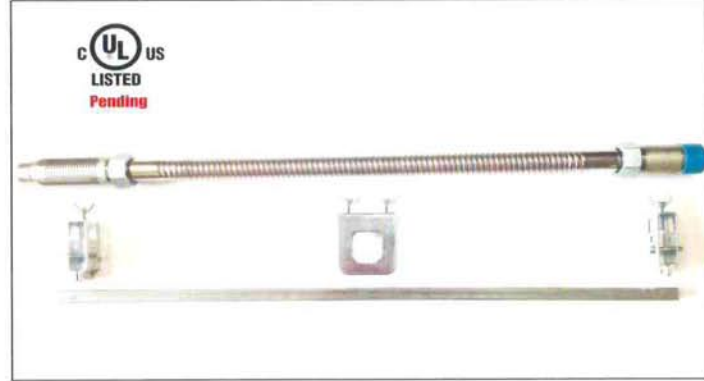

Model: TU25 (Un-braided)

Approvals: UL Listed

Application: Commercial Suspended Ceilings

Design Criteria: NFPA 13, 13D or 13R, UL 2443

Rated Working Pressure: 12 Bar (175 PSI)

Test Pressure: 48 Bar (700 PSI)

Maximum Ambient Temperature: 107°C (225°F)

Available Length: 700mm, 1000mm, 1200mm, 1500mm, 1800mm



Model	NPT/BSPT/ Rp in.	K-Factor	Minimum Bend Radius In. (mm)	Number Of Bends	Rated Working Pressure PSI (Kpa)	Hose Assembly Length In. (mm)
TU25	1/2	5.6	4 (100)	1	175 (1206)	28 (700)
TU25	1/2	5.6	4 (100)	2	175 (1206)	40 (1000)
TU25	1/2	5.6	4 (100)	3	175 (1206)	48 (1200)
TU25	1/2	5.6	4 (100)	3	175 (1206)	60 (1500)
TU25	1/2	5.6	4 (100)	3	175 (1206)	71 (1800)
TU25	3/4	8.0	4 (100)	1	175 (1206)	28 (700)
TU25	3/4	8.0	4 (100)	2	175 (1206)	40 (1000)
TU25	3/4	8.0	4 (100)	3	175 (1206)	48 (1200)
TU25	3/4	8.0	4 (100)	3	175 (1206)	60 (1500)
TU25	3/4	8.0	4 (100)	3	175 (1206)	71 (1800)