


FLOJET®

FLOJET DUPLEX II SERIES VSD
FLOJET QUAD SERIES VSD

INTRODUCING THE FLOJET AC VARIABLE SPEED DRIVE PUMP SERIES

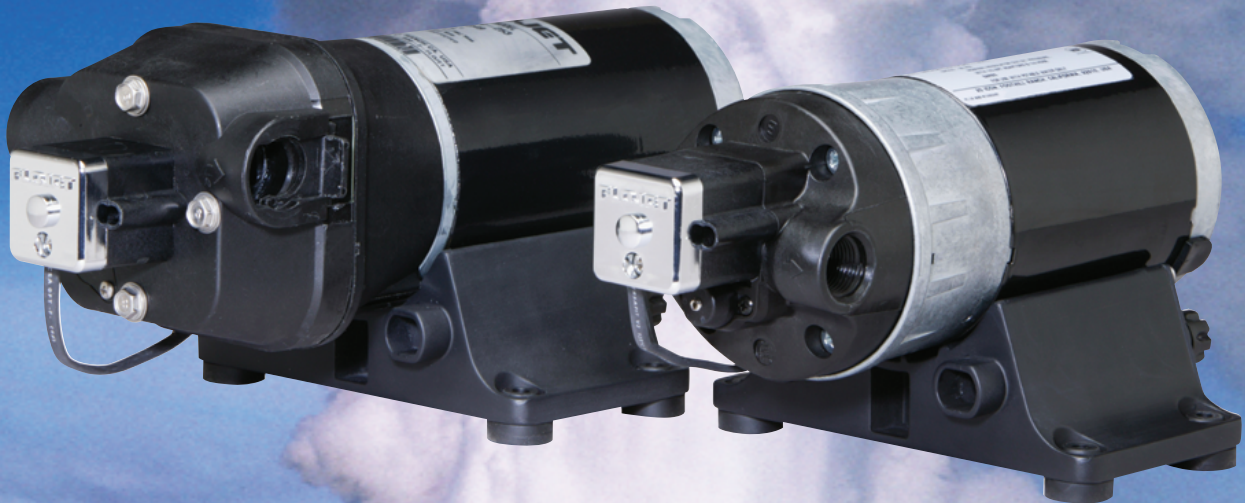

Quad Model

Duplex II Model

Flojet



ITT Industries
Engineered for life

The Flojet AC VSD Series Pumps

The Flojet AC VSD Pumps automatically adjust in real time to changes in flow due to the number of valves in operation, filter back pressure, and changes in working fluid viscosity... so you don't have to.

The pumps match motor speed to system demand. As the demand for fluid increases, the motor responds to increase flow. Conversely, as the demand lessens, the motor slows to a "super quiet" speed, always maintaining a constant system pressure. The result is exceptionally stable flow and reduced amp draw.

The new Flojet AC VSD pumps provide stable, constant-pressure operation on any AC application. Operation from no flow to maximum flow is proportionally controlled, eliminating unwanted pump switch cycling and the need for an accumulator tank.

SPECIAL FEATURES

- Maintains steady fluid pressure in response to variable flow demand
- High pressure (80 psi / 5.5 bar) and low pressure (45 psi / 3.1 bar) models available
- No pressure switch
- Conserves energy, low amp draw
- Quiet running under normal use
- Automatically adjusts motor speed to maintain constant system pressure
- Improves overall system performance
- Eliminates need for bulky accumulator tank
- Excellent solution for limited space requirements

MODEL NUMBERS

Duplex II Models (Pump with VSD Module)

D3635H8011A	115 VAC	3 12" Wires
D3835H8011A	115 VAC	Cable with Plug

Quad Models (Pump with VSD Module)

04520043A	115 VAC	3 12" Wires
04520500A	115 VAC	Cable with Plug

SPECIFICATIONS - DUPLEX II VSD

Pump Design	Positive Displacement Diaphragm (2 Piston)
Power Source	AC
Materials	Polypropylene housing, Santoprene* diaphragm, EPDM** check valves
Fluid Temperature Limits	130° F (55° C)
Weight	5.61 lbs. (2.54 kg.)
Motor	Permanent Magnet Rectified
Amp Draw, 115 V	0.85 Amps (Max draw @ 80 PSI / 5.5 bar)
Flow Rate, 115 V	1.9 GPM (7.3 LPM) - Open Flow
Voltages	115 V
Cycles	60 Hz
Recommended Duty Cycle	Intermittent
Dimensions	3.63" H x 4.00" W x 8.38" L (92 mm x 102 mm x 213 mm)

UL listed


NSF Standard 18

* A Registered trademark of Monsanto Co.

** Consult factory for other materials or voltage options

DIMENSIONS inches (mm)

Duplex II Model

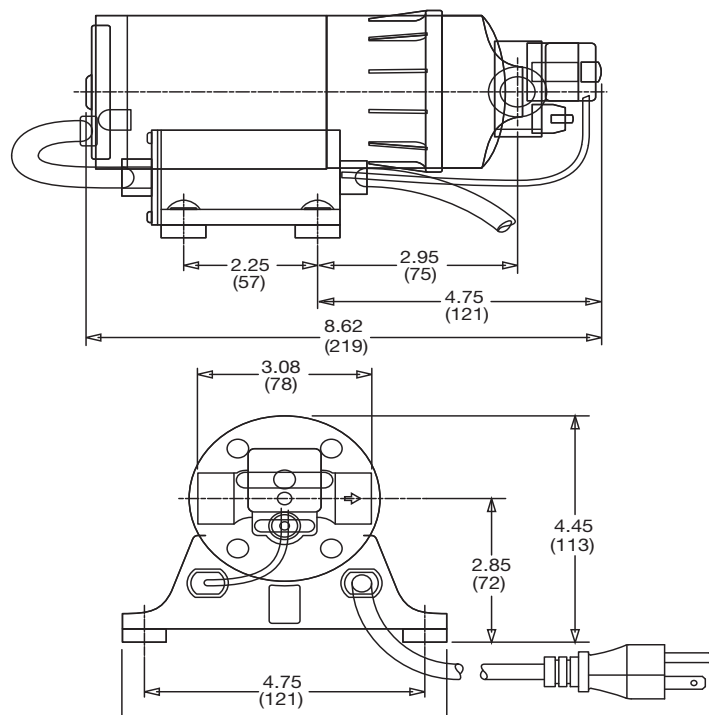

SPECIFICATIONS - QUAD VSD

Pump Design	Positive Displacement Diaphragm (4 Piston)
Power Source	AC
Materials	Polypropylene housing, Santoprene* diaphragm, EPDM** check valves
Fluid Temperature Limits	130° F (55° C)
Weight	6.63 lbs. (3.0 kg.)
Motor	Permanent Magnet Rectified
Amp Draw, 115 V	1.50 Amps (Max draw @ 45 PSI / 3.1 bar)
Flow Rate, 115 V	5.0 GPM (18.8 LPM) - Open Flow
Voltages	115 V
Cycles	60 Hz
Recommended Duty Cycle	Intermittent
Dimensions	3.75" H x 6.30" W x 9.00" L (95 mm x 160 mm x 221 mm)


UL listed

NSF pending

* A Registered trademark of Monsanto Co.

** Consult factory for other materials or voltage options


Quad Model

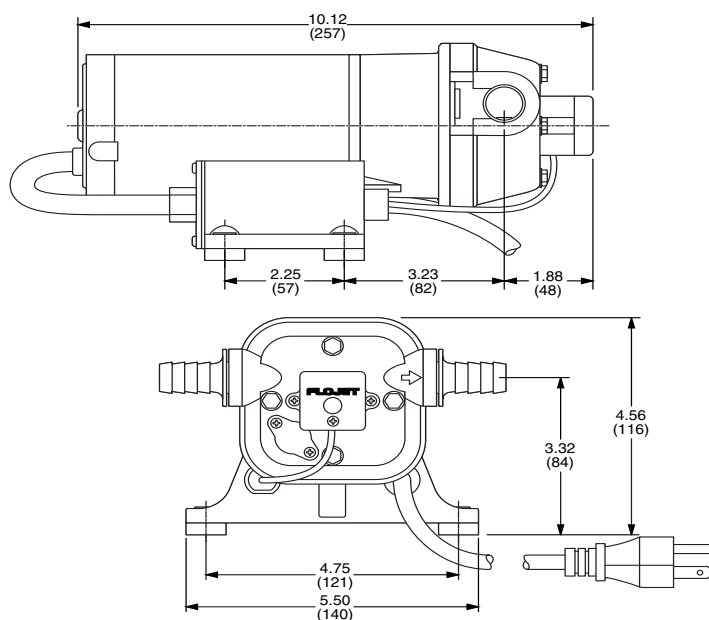


SENSOR-CONTROLLED PUMPS WITH VARIABLE SPEED DRIVE TECHNOLOGY

PUMP PERFORMANCE

Duplex II 115VAC, 60 Hz

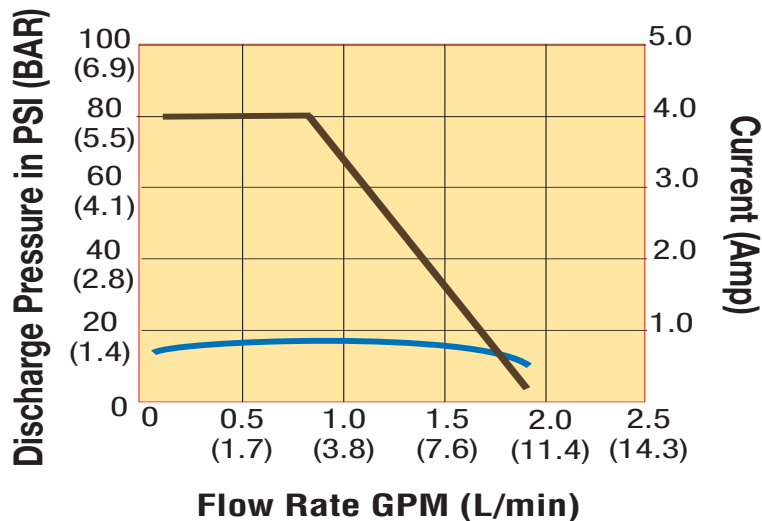

Quad 115VAC, 60 Hz

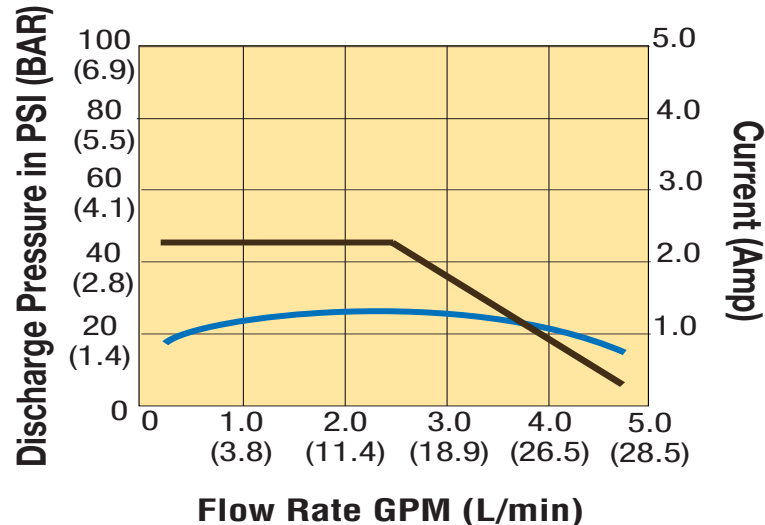

Flojet



ITT Industries
Engineered for life



www.flojet.com

For further information, contact your FLOJET representative, or write to:

U.S.A.
Flojet
20 Icon
Foothill Ranch, CA 92610
Tel: 949.859.4945
Fax: 949.859.1153

UNITED KINGDOM
Flojet
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

CANADA
Fluid Products Canada
55 Royal Road
Guelph, Ontario N1H 1T1
Tel: 519 821.1900
Fax: 519 821.2569

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222
Tel: 045.475.8906
Fax: 045.475.8908

GERMANY
Jabsco GmbH
Oststrasse 28
22840 Norderstedt
Tel: +49-40-53 53 73 -0
Fax: +49-40-53 53 73 -11

ITALY
Jabsco Marine Italia
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307